

# 1008TX Industrial Ethernet Switch

N-Tron Networking Series



## ▶▶▶ Industrial Unmanaged Gigabit Ethernet Switch

The unmanaged 1008TX Gigabit Ethernet switch features plug-and-play operation for up to eight 10/100/1000Base-T(X) connected devices in a compact industrial enclosure.

Red Lion's N-Tron® series 1008TX features eight Gigabit Ethernet ports in a hardened DIN-rail enclosure with redundant power inputs. The 1008TX unmanaged Ethernet switch provides expanded connectivity, plug-and-play installation, and jumbo frame support for high bandwidth applications. Ideal for deployment in oil and gas, water/wastewater, utility, transportation, mining and factory floor networking applications; the 1008TX enables customers to address the most demanding industrial communication requirements while providing high throughput and minimum downtime.



### APPLICATIONS

- > Oil & Gas
- > Water/Wastewater
- > Utility
- > Transportation
- > Mining
- > Manufacturing

### PRODUCT HIGHLIGHTS

- > Gigabit Network Performance
- > Plug-and-Play Operation
- > 10 to 49 VDC Redundant Power Inputs
- > -40° to 85°C Wide Operating Temperature

### FEATURES & BENEFITS

- > Eight 10/100/1000Base-T(X) RJ45 Ports
  - Quickly expand to meet Gigabit network application requirements
- > Unmanaged Switch Operation
  - IEEE 802.3, 802.3u and 802.3b compliance
  - Supports full/half duplex modes
  - Up to 16 Gb/s maximum throughput
  - Full wire speed communications
  - Jumbo frame support
  - Store-and-Forward switching technology
- > Redundant 10 to 49 VDC Power Inputs
  - Keeps network running in the event of a power supply failure
- > Extended Environmental Specifications
  - -40° to 85°C operating temperature range
  - > 2M Hours MTBF
  - UL/cUL: Class I, Div 2 Groups A, B, C and D
  - Designed to comply with IEEE 1613 for electric utility substations and NEMA TS1/TS2 for Traffic control
  - ABS for shipboard applications
- > LED Status Lights
  - Display power and connectivity conditions
- > Hardened Metal DIN-Rail Enclosure

industrial  
networking



# 1008TX Specifications

## SWITCH PROPERTIES

Operation: Unmanaged  
 Number of MAC Addresses: 8,000  
 IEEE Compliant: 802.3, 802.3u, and 802.3ab  
 Latency (typical): 3.2  $\mu$   
 Switching Method: Store-and-Forward  
 Activity Status Indication: LED link  
 MTBF: >2 million hours  
 Supports Full/Half duplex operation  
 Maximum Throughput: Up to 16.0 Gb/s  
 MDIX Auto Sensing cable  
 Auto Sensing Speed and Flow Control  
 Communications: Full Wire Speed

## POWER INPUT

Input Voltage: 10-49 VDC  
 Steady Input Current: 250 mA @ 24 V  
 Inrush: 20 A / 60 us @ 24 VDC  
 BTU/HR: 20.5

## CONNECTORS

10/100/1000BaseT: Eight (8) RJ-45 TX copper ports

## NETWORK MEDIA

10BaseT:  $\geq$  Cat3 cable  
 100BaseTX:  $\geq$  Cat5 cable  
 1000BaseT:  $\geq$  Cat5e cable


## RECOMMENDED WIRING CLEARANCE

Front: 2" (5.08 cm)  
 Top: 1" (2.54 cm)

## ENVIRONMENTAL

Operating Temperature: -40°C to 85°C  
 Storage Temperature: -40°C to 85°C  
 Operating Humidity: 10% to 95% (Non Condensing)  
 Operating Altitude: 0 to 10,000 ft.  
 Shock: 200 g @ 10 ms  
 Vibration/Seismic: 50 g, 10-200 Hz, triaxial

## DIMENSIONS in inches (mm)

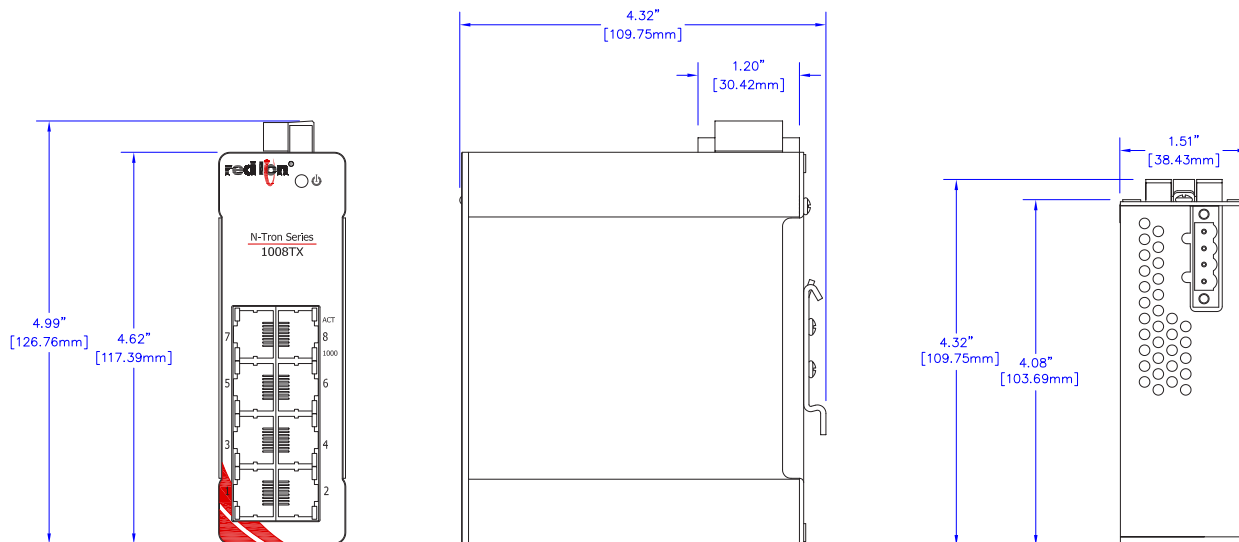

## CERTIFICATION & COMPLIANCE

Product Safety: UL/cUL: Class I, Division 2, Groups A, B, C and D;  
 T4 UL 508, ANSI/ISA-12.12.01-2013, C22.2 No.14-M05  
 and C22.2 No.213-M1987  
 Immunity: CE, EN 61000-4/2/3/4/5/6, EN 61000-6-2/4  
 Emissions: EN 55011, ICES-003, FCC/CE (CFR 47, Part 15,  
 Subpart B, Class A)  
 Rail: EN 50155, EN 50121 and EN 61373  
 ABS Type Approval for Shipboard Applications  
 RoHS compliant  
 Designed to comply with: IEEE 1613 for Electric Utility Substations  
 NEMA TS1/TS2 for Traffic Control

## MECHANICAL

Case Dimensions  
 Height: 4.62" (11.73 cm)  
 Width: 1.51" (3.84 cm)  
 Depth: 4.08" (10.36 cm)  
 Weight: 0.90 lbs (0.49 kg)  
 Mount: DIN Rail 35 mm

## WARRANTY

3 years on design and manufacturing defects

## ORDERING GUIDE

PART NUMBER	DESCRIPTION
1008TX	Eight Port 10/100/1000BaseT Unmanaged Industrial Ethernet Switch
NTPS-24-1.3	DIN-Rail Power Supply 24V@1.3 Amp
1000-PM	Panel Mount Kit

All specifications are subject to change. Consult the company website for more information.



[www.redlion.net](http://www.redlion.net)

Connect. Monitor. Control.

**Americas**  
[sales@redlion.net](mailto:sales@redlion.net)

**Asia-Pacific**  
[asia@redlion.net](mailto:asia@redlion.net)

**Europe  
 Middle East  
 Africa**  
[europe@redlion.net](mailto:europe@redlion.net)

+1 (717) 767-6511

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our automation, Ethernet and cellular M2M technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. Red Lion is part of Spectris plc, the productivity-enhancing instrumentation and controls company. For more information, please visit [www.redlion.net](http://www.redlion.net).

ADLD0372 040615 ©2015 Red Lion Controls, Inc. All rights reserved. Red Lion, the Red Lion logo, N-Tron and Sixnet are registered trademarks of Red Lion Controls, Inc. All other company and product names are trademarks of their respective owners.