

Graphite™ Module: HSPA+ Cellular

Red Lion Automation Series



▶▶▶ High-Speed HSPA+ Cellular Communication

The HSPA+ plug-in module expands the communication reach of our Graphite HMI operator interface panels by providing a high-speed cellular connection to remote assets.

The new module uses an HSPA+ cellular network to provide reliable high-speed data communication to remotely-located assets across oil and gas, water and wastewater, power, utility and alternative energy applications. Configure the HSPA module using Red Lion's Crimson® software, which makes setup simple via an intuitive graphical user interface with drag-and-drop functionality.



APPLICATIONS

- > Alternative Energy
- > Oil & Gas
- > Power
- > Utility
- > Water and Waste Water

PRODUCT HIGHLIGHTS

- > Remotely Monitor and Control Assets
- > High-Speed Cellular Data Connection
- > Removes Need for External Gateways
- > All-in-One Solution, Easily Programmed

FEATURES & BENEFITS

- > Remote Monitoring and Control
 - Reliable high-speed cellular communication to monitor remote equipment and processes
 - Leverage powerful Graphite HMI functionality through virtual HMI
 - Receive real-time email or SMS notifications
- > All-in-One Solution
 - Removes need for external devices and communication gateways
 - Cost-effectively saves space and time
- > -30° to 60°C Operating Temperature
 - Reliably works in harsh environments
- > Powered from Graphite Host
 - Simplifies deployment by eliminating external power
- > Easily Programmed
 - Seamless configuration using Red Lion's Crimson desktop software

industrial

automation



▶▶▶ HSPA+ Cellular Module Specifications

POWER

GMHSPA Power Consumption:
 HSPA+ Mode: 3.5 W avg. (5.4 W max)
 GPRS Mode: 8.5 W avg. (15 W max)

COMMUNICATION PROPERTIES

HSPA+ with Fallback Capability to 3G and 2G
 Maximum Speeds: downlink 21 Mbps, upload 5.76 Mbps
 Antenna Isolation from Graphite host device 500 VDC for 1 minute

ANTENNA CONNECTOR

One (1) SMA Female Connector on module
 Requires 50 Ohm antenna with SMA male connector
 Penta-band HSPA+ antenna (850/900/1700/1900/2100 MHz) global
 Dual-band antenna (850/1900 MHz) US and Canada
 Dual-band antenna (900/2100 MHz) Europe

CERTIFICATIONS AND COMPLIANCES

CE Approved:
 EN 61326-1 to Industrial Locations
 IEC/EN 61010-1
 RoHS Compliant


ENVIRONMENTAL

Operating Temperature Range: -30° to +60°C
 Storage Temperature Range: -40° to +85°C
 Operating and Storage Humidity: 85% max relative humidity,
 non-condensing
 Altitude: Up to 2000 meters

ORDERING GUIDE

PART NUMBER	DESCRIPTION
GMHSPA00	Graphite Module, HSPA+ Cellular Module
ANT-TG090113	2G/3G 3" Hinged Antenna
ANT-G30B108111	2G/3G/4G LTE Low Profile Direct Permanent Mount Antenna, IP67 Rated
ANT-GA107201111	2G/3G 4.5" Whip Magnetic Mount Antenna, IP65 Rated
ANT-G21B301111	2G/3G Low Profile Direct Permanent Mount Antenna, IP65 Rated

DIMENSIONS In inches (mm)

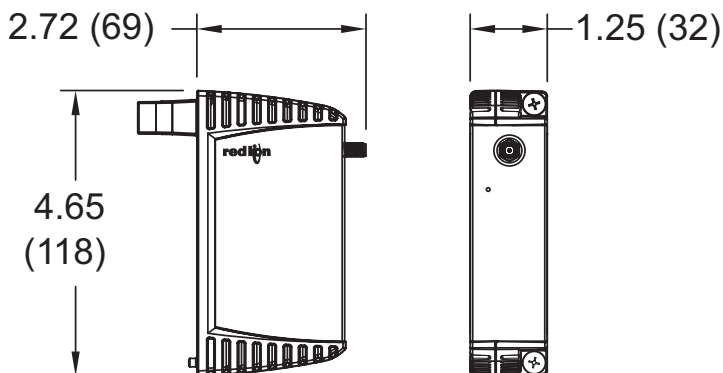

www.redlion.net

Connect. Monitor. Control.

Americas
 sales@redlion.net

Asia-Pacific
 asia@redlion.net

Europe
Middle East
Africa
 europe@redlion.net

+1 (717) 767-6511

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our automation, Ethernet and cellular M2M technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. Red Lion is part of Spectris plc, the productivity-enhancing instrumentation and controls company. For more information, please visit www.redlion.net.

ADLD0408 042015 ©2015 Red Lion Controls, Inc. All rights reserved. Red Lion, the Red Lion logo, N-Tron and Sixnet are registered trademarks of Red Lion Controls, Inc. All other company and product names are trademarks of their respective owners.