

## ▶▶▶ Secure IP67 Industrial Router

Red Lion's RAM-6021M12 IP67 industrial router provides secure network communication between local and wide area networks.

Housed in a rugged IP67, dustproof and water-resistant metal enclosure, the RAM-6021M12 is designed to withstand harsh industrial environments including temporary immersion in water, exposure to water jets, and extreme shock and vibration levels, making it ideal for industries where hardened products are required. The RAM-6021M12 platform provides the ability to remotely connect, monitor and control assets across a variety of industrial applications. The unit's event engine can be customized to trigger I/O or email alerts to quickly notify personnel of critical events based on operational data. Add in robust security features, which include a stateful firewall, NAT translation and VPN connections, and the RAM-6021M12 delivers a compact all-in-one solution that seamlessly connects to existing Ethernet infrastructures, including networks with Modbus and DNP3-enabled devices.



### APPLICATIONS

- > Factory Automation
- > Food & Beverage
- > Transportation
- > Water/Wastewater
- > Oil & Gas
- > Utilities
- > Packaging

### PRODUCT HIGHLIGHTS

- > Rugged IP67 industrial design
- > LAN-to-LAN or LAN-to-WAN connectivity
  - Intrusion protection through stateful firewall
  - NAT support for 1-to-1 and 1-to-many translations
  - 25 VPN connections for secure remote access
  - Built-in Modbus and DNP3 gateways
  - Event engine to trigger I/O or send email alerts
- > Secure network routing and communication

### FEATURES & BENEFITS

- > Simple network setup
- > DHCP server/DHCP relay
- > Built-in security and routing protects against unwanted intrusion
- > IPsec and SSL VPN tunnels
- > Port forwarding
- > Stateful firewall
- > Packet filtering
- > Access control list (ACL)
- > Flexible all-in-one platform reduces complexity
  - Remote TCP/IP based capabilities
  - SNMP v1, v2, v3
  - Serial-to-IP conversion
  - Access IP and serial devices simultaneously
- > Compact IP67 hardened enclosure
- > -40 to 80 °C operating temperature
- > Bulkhead mounting
- > Remote monitoring and control eliminates site visits
  - Instant access to SCADA data
  - Modbus and DNP3 (serial and IP) protocol support
- > Intuitive web-based interface simplifies management and configuration
  - Remote diagnostics and troubleshooting
  - Key metric reporting
  - Built-in data capture for enhanced troubleshooting
  - RAMQTT for cloud connectivity
  - Syslog

# RAM-6021M12 Specifications

## FEATURES & BENEFITS (CONT.)

- > IEEE 802.3 compliance
- > Extended environmental specifications
  - -40 to 80 °C operating temperature
- > Redundant power inputs (8-49 VDC)
- > LED link/activity status indication
- > IP67 Protection
  - Dustproof
  - Protection against low/high pressure water jets
  - Temporary immersion in water
- > ESD protection diodes on all ports
- > Surge protection diodes on power inputs

## SPECIFICATIONS

### TUNNELING

IPsec and SSL

### IP

NAT, port forwarding, dynamic DNS, DHCP  
 Stateful inspection firewall, IP transparency  
 Routing Protocols  
 OSPF, BGP, RIP, VRRP  
 Encapsulation protocols  
 GRE

### PROTOCOL GATEWAY

Modbus RTU/TCP/ASCII/RTU  
 DNP3 - slave

### ETHERNET INTERFACE (10/100 AUTO-SENSING)

Five (5) M12 D-Code Connectors (port 5 - WAN/LAN capability)

### DATA THROUGHPUT

LAN ports: 100 Mbps  
 WAN port: 45 Mbps

Ethernet



### SERIAL INTERFACE

One (1) M12 8-Pin A-Code  
 One (1) digital output  
 One (1) digital/analog input (one active)  
 Configuration Pinouts:  
 1. GND 2. SERIAL\_RX 3. SERIAL\_TX 4. DIGITAL\_OUT  
 5. DIGITAL\_IN/ANALOG\_IN 6. GND 7. SERIAL\_RTS 8. SERIAL\_CTS

### USB INTERFACE


One (1) M12 USB Type B, Mini (Mini-B 5-pin)

### MECHANICAL

Width: 4.32" (10.97 cm)  
 Height: 5" (12.70 cm)  
 Depth: 2.1" (5.33 cm)  
 Weight: 1.75 lbs (0.79 kg)

### POWER INPUT

One (1) M12 A-Code Connector  
 Input Voltage: 8-49 VDC  
 BTU/hr: 12.25  
 Steady Input Current: 0.15 A @ 24 VDC  
 Inrush: 33.9 A/0.0287 ms @ 24 VDC



### ENVIRONMENTAL

Shock: IEC 60068-2-27: 200 g @ 10 ms (bulkhead mounted)  
 Vibration: IEC 60068-2-6: 50 g, 5-200 Hz (bulkhead mounted)

## CERTIFICATION AND COMPLIANCES

### Product Safety:

ANSI/ISA 12.12.01-2015 Class I and II, Div. 2 and Class III, Div. 1 and 2,  
 Groups A, B, C and D Hazardous Locations  
 UL508 17th Ed. Industrial Control Equipment  
 CAN/CSA-C22.2 No. 213-16 Class I Div. 2 Hazardous Locations  
 CAN/CSA-C22.2 No. 14-13 Industrial Control Equipment

### Emissions:

FCC Title 47, Part 15, Radio Frequency Devices, Subpart B ANSI  
 C63.4-2014; Industry Canada ICES-003, EN 61000-6-4,  
 EN 61000-3-2, EN61000-3-3

### Immunity:

EN 61000-6-2; IEC 61000-4-2 (ESD); IEC 61000-4-3 (RFAM); IEC  
 61000-4-4 (EFT); IEC 61000-4-5 (SURGE); IEC 61000-4-6 (RFCM);  
 IEC 61000-4-8 (PFMF); IEC 61000-4-11 (VDI)

### Rail:

EN 50155, EN 50121, EN 61373 and EN 45545-2

### Designed to Comply with:

IEEE 1613 (Electric Utility Substations), NEMA TS1/TS2 (Traffic Control)

### Other:

EMC Directive 2014/30/EU; LV Directive 2014/35/EU, Restriction of  
 Hazardous Substance 2011/65/EU, RoHS Compliant  
 ABS Type Approval for Shipboard Applications

## WARRANTY

3 years on design and manufacturing defects

## ORDERING GUIDE


PART NUMBER	DESCRIPTION
RAM-6021M12	RAM-6021M12 IP67 secure industrial router
M12DRC-ISO	DIN-Rail kit, two isolated plastic clips
M12DRC-MTL	DIN-Rail kit, two metal clips
NTPS-24-1.3	DIN-Rail power supply 1.3 Amp @ 24 VDC

## CABLE ACCESSORIES ORDERING GUIDE

PART NUMBER	DESCRIPTION
<b>Ethernet Cables</b>	
CAT5E-M12-M12-X	Straight M12 to straight. M12, shielded
CAT5E-M12-RJ45-X	Straight M12 to RJ-45, shielded
CAT5E-M12-X	Straight M12 to bare end, shielded
CAT5E-RM12-M12-X	90° M12 to straight. M12, shielded
CAT5E-RM12-RM12-X	90° M12 to 90° M12, shielded
CAT5E-RM12-RJ45-X	90° M12 to RJ-45, shielded
<b>Serial Cables</b>	
SERIAL-DB9-M12A	M12 A-Code 8-pin to DB9-F serial cable 5 ft
CBL-IO-M12A-5	M12 A-Code 8-pin to 3 WR 22 AWG cable 5 ft
CONN-M12A-1	A-Code M12 straight 8-pin connector pack of 1
<b>Power Cables</b>	
PWR-M12-A-X	Power cable, M12 A-Coded straight female to bare end, shielded
PWR-RM12-A-X	Power cable, M12 A-Coded 90° female to bare end, shielded
<b>USB Cables</b>	
USBA-M12	6.5' USB Type A to M12 mini-USB type B cable


Where: X = length of cable

## DIMENSIONS In inches (mm)

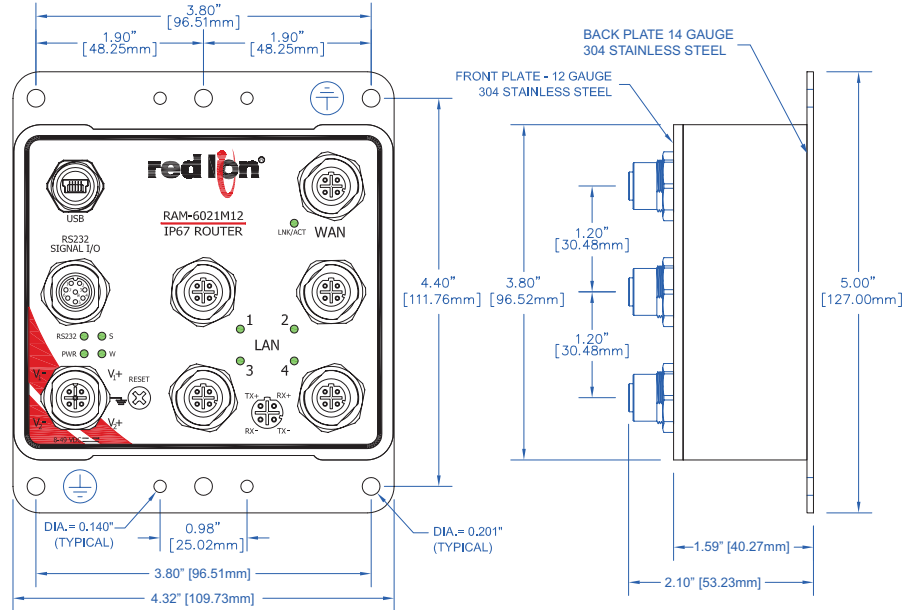

All specifications are subject to change. Consult the company website for more information.

## Industrial Ethernet Network Topology using a NAT device to translate IP addresses between cells.

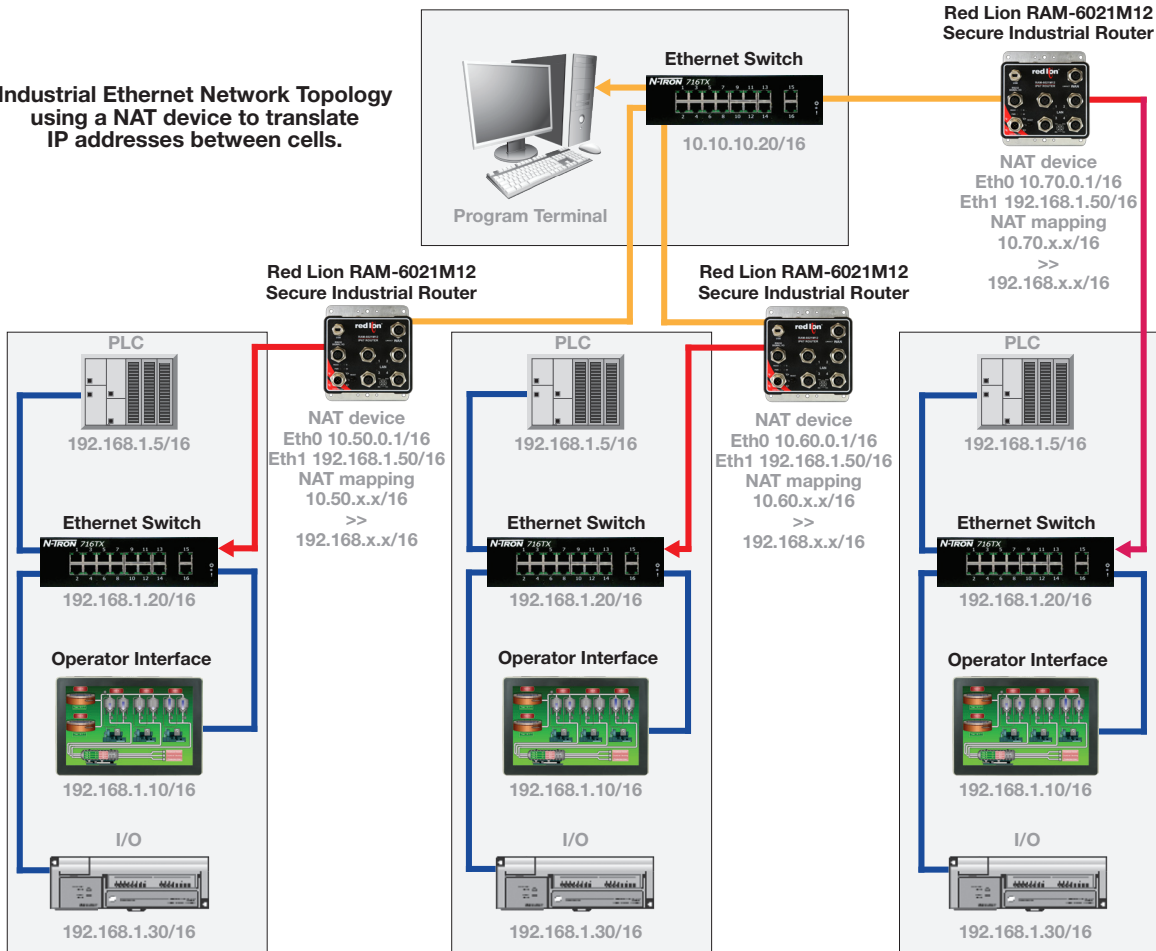

[www.redlion.net](http://www.redlion.net)

Connect. Monitor. Control.

**Americas**  
sales@redlion.net

**Asia-Pacific**  
asia@redlion.net

**Europe**  
**Middle East**  
**Africa**  
europe@redlion.net

+1 (717) 767-6511

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our automation, Ethernet and cellular M2M technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. Red Lion is part of Spectris plc, the productivity-enhancing instrumentation and controls company. For more information, please visit [www.redlion.net](http://www.redlion.net).

ADLD0485 060518 © 2018 Red Lion Controls, Inc. All rights reserved. Red Lion, the Red Lion logo, N-Tron and Sixnet are registered trademarks of Red Lion Controls, Inc. All other company and product names are trademarks of their respective owners.